

# SE 2051 Low Cost Pt100 Sensor

## protection tube

Construction	Closed- end tube, 6mm
Material	SS. 304
Insertion length "L" in mm	Specify by costumer
Outside diameter "D" in mm	Specify by costumer

## Lead Wire

Material	"P" for PVC Insulated "T" for Teflon Insulated "G" for Glass fiber Insulated "S" for silicon insulated
Length "X" in mm	Standard 2meters (Other length specify)

## Sensor


Type	"S" Single Pt100/ "D" Duplex Pt100"
Accuracy	According IEC 751 Class B
Electric Connection	3 Wire System
Range	-50 ~ +400 °C

## Option

Sensor class	A, 1/3B
Protection tube material	SS. 316
Electric connection	4 Wire System

## Orderig code

Model	<b>SE 2051 -</b> <input type="text"/>
Sensor (S or D)	<input type="text"/>
Outside diameter "D" in mm	<input type="text"/>
Insertion length "L" in mm	<input type="text"/>
Lead wire material	<input type="text"/>
Special option specify by customer	<input type="text"/>

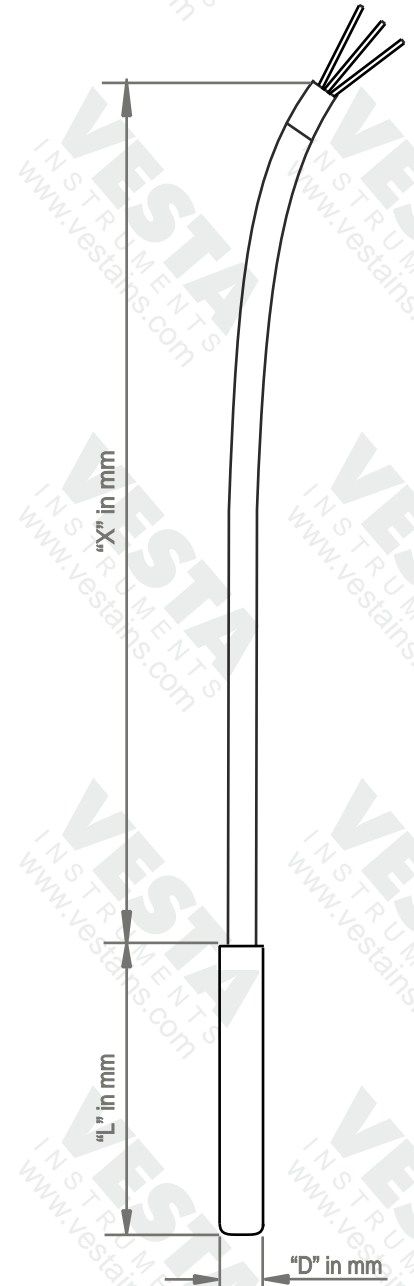

ISO 9001:2008



**VESTA**  
INSTRUMENTS  
www.vestains.com