

SE 2052 General Purpose Pt100 Sensor

protection tube

Construction	Closed-end tube, 5mm
Material	SS. 304
Insertion length "L" in mm	Customer to specify
Process connection	5/16"

Lead Wire

Material	"P" for PVC Insulated "T" for Teflon Insulated "G" for Glass fiber Insulated "S" for Silicon Insulated
Length "X" in mm	Standard 2meters (Other length specify)

Sensor


Type	S" Single Pt100 / "D" Duplex Pt100"
Accuracy	According IEC 751 Class B
Electric Connection	3 Wire System
Range	-50 ~ +400 °C

Option

Sensor class	A, 1/3B
Process connection	Other connection specify
Protection tube material	SS. 316
Electric Connection	4 Wire system

Orderig code

Model	SE 2052 -				
Sensor (S or D)					
Insertion length "L" in mm					
Lead wire material					
Special option specify by customer					

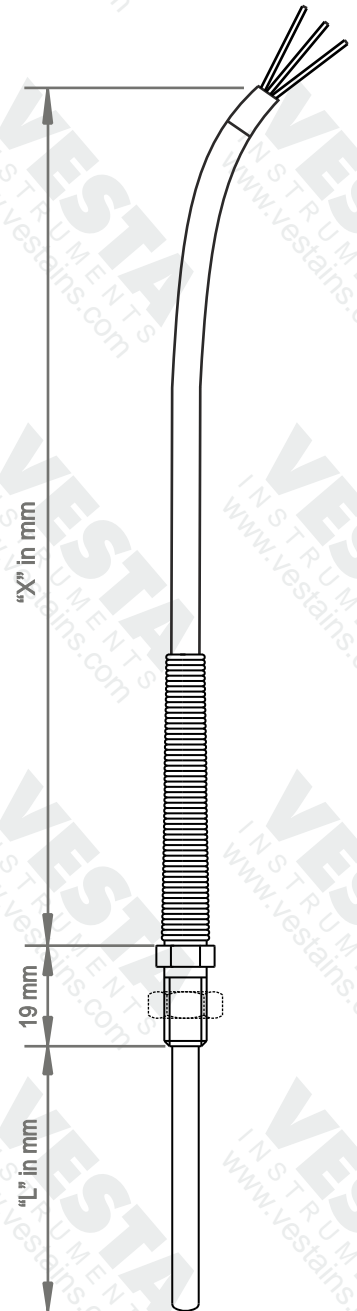

ISO 9001:2008



VESTA
INSTRUMENTS
www.vestains.com